### The AMERICAN RIFLEMAN

Official Journal of the National Rifle Association of America
1600 RHODE ISLAND AVENUE, N.W., WASHINGTON 6, D. C.

VOLUME 97

NUMBER 4

| APRIL                      | 1949 |
|----------------------------|------|
|                            |      |
| Chipped Keystone           | . 12 |
| Free-Rifle Shooting—Reborn | . 13 |
| Bullet Behavior            | . 16 |
| The Thuer Conversion       | . 21 |
| By John E. Parsons         |      |
| New M1 Course for Marines  | . 25 |
| Legislative Bulletin       |      |
| Loads for the '06          | . 28 |
| Bullet Design              | . 32 |
| Warp-Proof Stocks          | . 35 |
| Damascus Barrel Bogey      | . 36 |
| A Cheechako's Observations | . 39 |
| Muscles & Marksmanship     | . 42 |

\* \* \*

C. B. LISTER, Editor

JOHN SCOFIELD, Managing Editor

J. S. HATCHER, Technical Editor

J. A. HARPER, Associate Editor

Old Coach

R. J. STANN, Associate Editor


L. Q. BRADLEY, Circulation

F. A. MOULTON, Advertising

J. T. BERRYMAN, Art P. B. CARDINAL, News R. L. REIS APRIL, NINETEEN FORTY-NINE

R. L. REISH, Photography

## SOUTH BEND 14" PRECISION DRILL PRESS

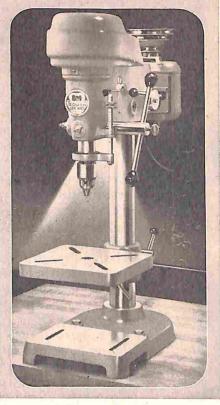

Here is a drill press that will enable you to do the finest gunsmithing. Built for the most exacting industrial work, it is extremely accurate and smooth in operation.

Write for catalog today.

### SPECIFICATIONS

CAPACITY

Maximum drill size in iron or steel — 1/2". Drills to center of a 14-1/4" circle.

сниск

Capacity . . . . 0 to 1/2".

SPINDLE

Regular drill chuck type supplied. Travel . . . 4".

CHUCK TO BASE DISTANCE Bench Model . . . . . 17" Floor Model . . . . 46-1/2"

TABLE SIZE

10"x10". Tilts to any angle.
SPINDLE SPEEDS

Four - 655 to 4530 r.p.m.

MOTOR


1725 r.p.m., 1/3 or 1/2 h.p.

Bench \$12930


Time Payments—\$33.30 down, and 12 monthly payments of \$8.48.

Prices, f.o.b. factory, include chuck; 1/3 h.p., 1
phase, 60 cycle
motor and switch.

motor and switch



FREE-FLOATING SPINDLE No misalignment, side thrust or whip. 6 precision splines.



4 PRECISION BALL BEARINGS
Two on spindle, two
on drive sleeve. Prelubricated, sealed
type. No oiling or adjustment required.

### SOUTH BEND LATHE WORKS

Building Better Tools Since 1906 452 E. MADISON STREET, SOUTH BEND 22, INDIANA

# THE AMERICAN BIFLEMAN SE

